


Codan 3310 Air / Water Hose

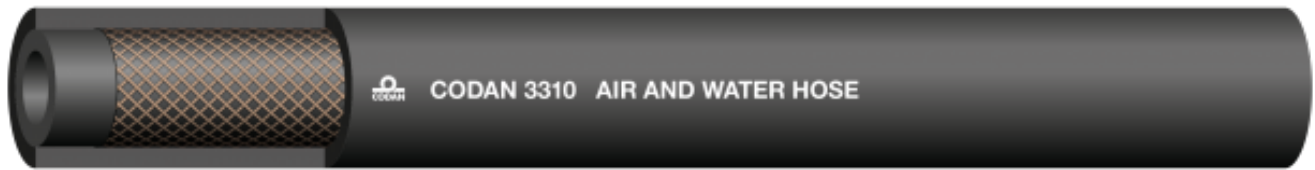

Codan 3310 - ISO 1403: 1995

Black, flexible universal hose for air and water. High-quality EPDM inside and outside ensures good weather and ozone resistance in any environment. For use in industrial applications for cold and hot water, compressed air and chemicals (acids excepted). Resistant to acetates and ketones. Please contact Codan for further information.

Type nr. 3310

Application: Air / Water Hose

Standard Length: 50 metres

Working Temperature: -40°C to 100°C

Inside: EPDM

Colour: Black

Reinforcement: Ester

Outside: EPDM

Colour: Black

Standards: ISO 1403: 1995

Inside dia. (mm)	Outside dia. (mm)	Working Pressure BAR	Burst Pressure BAR	Bend Radius (mm)	Weight (g/m)	Product code
6,3	13,1	10	40	40	142	3310006000
7,9	14,7	10	40	44	166	3310008000
9,5	16,3	10	40	50	191	3310010000
12,7	19,9	10	40	60	254	3310013000
15,9	23,1	10	40	70	305	3310016000
19,1	27,1	10	40	80	402	3310019000
25,4	33,6	9	33	110	525	3310025000

This hose specification sheet has been prepared with great care in order to provide you with all the information you need. Written advice must be obtained from Codan Rubber before using any hose with untested media or before using in applications not covered in the product data sheet. Codan Rubber recommends regular maintenance, care and inspection of hoses before use. Hoses should be replaced if any physical damage is seen, especially to the cover of the hose or in the area around the couplings. All products must be stored in accordance with ISO 2230:2002 (Storage

of vulcanised Rubber Products). The individual conditions of an application will affect the life time of each product. Therefore please ensure that resistance to chemicals and cleaning procedures in our written product information is complied with. Codan Rubber's warranty is void in the event of misuse such as excessive bending, crushing, stretching, use with incorrect media or use in environments outside the hose specification. Please contact Codan Rubber for individual product manufacturing tolerances.



Codan Rubber A/S Værkstedvej 45-49, DK-4600 Køge, Denmark Tel. +45 56 64 64 64 Fax +45 56 64 65 48
Mail: info@codan.com www.codan.com

06/03/2018